

11

Index & Reference



Section 11

Reference

Conversion Tables	494
Glossary	496

Index

Reference Number	501
Part Number	504
Alphabetical	514
Products At A Glance	2 through 15



Converting from one unit to another

The following tables provide the most frequent conversions for use in vacuum applications. Text books or other reference manuals offer additional conversion factors.

In all of the tables below, the original units are listed in the left-hand column. Locate the conversion factor by intersecting the row of the original units with the column of the final units. Multiply the number of original units by the factor to obtain the number of final units.

Using the sample table at the right, gram weight is multiplied by 3.527E-02 to obtain ounce weight. For example, 281 grams would convert to ounces by: $281 \times .03527 = 9.911 \approx 10$ oz. Note that conversion factors are intended for reference use only.

Sample conversion: grams to ounces

Weight

	lb	oz	g
lb	1	1.600E+01	4.54E+02
oz	6.250E-02	1	2.84E+01
g	2.205E-03	3.527E-02	1
kg	2.205E+00	3.527E+01	1.00E+03

Diagram annotations: A box on the left lists 'lb', 'oz', and 'g'. An arrow points from 'g' to the 'g' column header. Another arrow points from 'g' to the 'oz' row, with the value '3.527E-02' circled and labeled 'Multiplied by'. A third arrow points from '3.527E-02' to the 'oz' column header, with the word 'equals' written next to it.

Pressure

	Pa N·m ⁻²	mbar millibar	Torr mm Hg	micron mTorr	atm atmos	kg _f cm ⁻²	psi lb _f in ⁻²
Pa	1	1.00E-02	7.50E-03	7.50E+00	9.87E-06	1.02E-05	1.45E-04
mbar	1.00E+02	1	7.50E-01	7.50E+02	9.87E-04	1.02E-03	1.45E-02
Torr	1.33E+02	1.33E+00	1	1.00E+03	1.32E-03	1.36E-03	1.93E-02
micron	1.33E-01	1.33E-03	1.00E-03	1	1.32E-06	1.36E-06	1.93E-05
atm	1.01E+05	1.01E+03	7.60E+02	7.60E+05	1	1.03E+00	1.47E+01
kg _f cm ⁻²	9.80E+04	9.80E+02	7.36E+02	7.36E+05	9.68E-01	1	1.42E+01
psi	6.89E+03	6.89E+01	5.17E+01	5.17E+04	6.81E-02	7.03E-02	1

Example:

2.00E-05 Torr	2.66E-03	2.66E-05	2.00E-05	2.00E-02	2.64E-08	2.72E-08	3.86E-07
---------------	----------	----------	----------	----------	----------	----------	----------

Leak Rate

	Pa·ls ⁻¹	mbar·ls ⁻¹	Torr·ls ⁻¹	std cc·s ⁻¹
Pa·ls ⁻¹	1	1.00E-02	7.50E-03	9.87E-03
mbar·ls ⁻¹	1.00E+02	1	7.50E-01	9.87E-01
Torr·ls ⁻¹	1.33E+02	1.33E+00	1	1.32E+00
std cc·s ⁻¹	1.01E+02	1.01E+00	7.60E-01	1

Example:

1.00E-07 mbar·ls ⁻¹	1.00E-05	1.00E-07	7.50E-08	9.87E-08
--------------------------------	----------	----------	----------	----------

Flow Rate

	gpm	gps	l·m ⁻¹	l·s ⁻¹
gpm	1	1.67E-02	3.79E+00	6.31E-02
gps	6.00E+01	1	2.27E+02	3.79E+00
l·m ⁻¹	2.64E-01	4.40E-03	1	1.67E-02
l·s ⁻¹	1.59E+01	2.64E-01	6.00E+01	1

Example:

2.5 gpm	2.50E+00	4.17E-02	9.46E+00	1.58E-01
---------	----------	----------	----------	----------



Length

	foot ft	inch in	meter m	centimeter cm	millimeter mm	micron μm	Angstrom Å
foot	1	1.20E+01	3.05E-01	3.05E+01	3.05E+02	3.05E+05	3.05E+09
inch	8.33E-02	1	2.54E-02	2.54E+00	2.54E+01	2.54E+04	2.54E+08
meter	3.28E+00	3.94E+01	1	1.00E+02	1.00E+03	1.00E+06	1.00E+10
centimeter	3.28E-02	3.94E-01	1.00E-02	1	1.00E+01	1.00E+04	1.00E+08
millimeter	3.28E-03	3.94E-02	1.00E-03	1.00E-01	1	1.00E+03	1.00E+07
micron	3.28E-06	3.94E-05	1.00E-06	1.00E-04	1.00E-03	1	1.00E+04
Angstrom	3.28E-10	3.94E-09	1.00E-10	1.00E-08	1.00E-07	1.00E-04	1

Example:

24 inch	2.00E+00	2.40E+01	6.10E-01	6.10E+01	6.10E+02	6.10E+05	6.10E+09
---------	----------	----------	----------	----------	----------	----------	----------

Weight

	lb	oz	g	kg
lb	1	1.600E+01	4.54E+02	4.54E-01
oz	6.250E-02	1	2.84E+01	2.84E-02
g	2.205E-03	3.527E-02	1	1.00E-03
kg	2.205E+00	3.527E+01	1.00E+03	1

Example:

10 kg	2.21E+01	3.53E+02	1.00E+04	1.00E+01
-------	----------	----------	----------	----------

Force

	lb _f	oz _f	N	kg _f
lb _f	1	1.60E+01	4.45E+00	4.54E-01
oz _f	6.25E-02	1	2.78E-01	2.83E-02
N	2.25E-01	3.60E+00	1	1.02E-01
kg _f	2.21E+00	3.53E+01	9.81E+00	1

Example:

5 lb	5.00E+00	8.00E+01	2.22E+01	2.27E+00
------	----------	----------	----------	----------

Torque

	lb _f -ft	oz _f -in	N-m	kg _f -m
lb _f -ft	1	1.92E+02	1.36E+00	1.38E-01
oz _f -in	5.21E-03	1	7.09E-03	7.25E-04
N-m	7.38E-01	1.41E+02	1	1.02E-01
kg _f -m	7.23E+00	1.38E+03	9.81E+00	1

Example:

15 lb-ft	1.5E+01	2.88E+03	2.03E+01	2.07E+00
----------	---------	----------	----------	----------

Note: The “_f” for “force” is frequently omitted in tables or text when the meaning is clear from the context.



18-8 ss A grade of stainless steel including 18% chromium and 8% nickel; typically used on bolts, screws and nuts

300 Series ss Generic reference to any stainless steel grade in the numerical 300 series family

304 ss Vacuum grade stainless steel; can be easily machined and welded; very low outgassing properties

304L ss Very low-carbon stainless steel

316 ss Vacuum grade stainless steel; low magnetic permeability

A or Amp Ampere; unit of electric current

Å Angstrom; unit of length; $1 \text{ Å} = 10^{-10} \text{ m}$

Abbe Error Linear off-axis error introduced through amplification of tilt and wobble with a long moment arm. This type of error occurs when the point under measurement is at a relatively long distance from the axis of motion, typically greater than 12"

AC Alternating current

Accuracy The maximum expected difference between the actual and a desired position for a given input. Highly dependent on method of actual position measurement

Accuracy, Absolute The output of a system versus the commanded or ideal input

Accuracy, On-Axis The uncertainty of position after all sources of linear error are eliminated. Some linear errors: cosine error, leadscrew pitch error, abbe error and thermal expansion effects

Actuator A portion of a device that provides motion to the internal parts of the device; typically manual or electropneumatic

Adapter Provides a transition from one method of sealing to a different method of sealing, such as metal seal to elastomer seal

AKA The abbreviation for "also known as"

AL or Al Aluminum

Aluminum 6061-T6 Vacuum grade aluminum

AM-350 A precipitation hardened stainless steel used in welded bellows; similar to 304L with a longer life in cycling

Amp or amps Ampere; unit of electric current

ANSI American National Standards Institute

ASA American Standards Association, replaced by ANSI

ASME American Society of Mechanical Engineers

ASTM American Society for Testing and Materials

Atm or atmos Atmosphere; used in pressure measurement reference

Austenitic stainless steels Iron-chromium-nickel alloys, provides good corrosion resistance, machining and welding properties; 304ss and 316ss are examples

AVS American Vacuum Society

AWG American Wire Gauge; corresponds with the number of operations of drawing a wire, thus a larger number, which represents more operations, results in a smaller diameter wire; AKA Brown & Sharpe gage; there are many wire gage methods

BA Bayard-Alpert (gauge); method of vacuum measurement

Backlash The maximum magnitude of an input that produces no measurable output upon reversing direction. Typically the result of poor meshing between drivetrain components as in lead screw threads

Bar A unit of pressure measurement; in vacuum applications, used as millibar

BC Bolt circle; the center to center distance of two bolt holes on the same diameter; generally may be used in specifying any centerline to centerline distance of elements on the same diameter; sometimes used in place of the connector circle (CC) for pins on an electrical connector

Best way A method of shipment to be selected by MDC which would be appropriate for the type of product to be shipped; see Ordering Information section

Blind hole A drilled hole that does not break through the metal; maintains the vacuum integrity of the drilled piece

Blind tapped A tapped blind hole; female threads inside a hole that does not break through the metal; maintains the vacuum integrity of the drilled and tapped piece

BNC Bayonet Naval Connector; a specific type of electrical connector that attaches without threads; used in 50 ohm and 75 ohm coaxial low power instrumentation transmission lines

Bolt length The portion of a bolt excluding the head; may be threaded completely or have a shank with partial threading

Bonnet The flanged connection of two parts of a valve; the flanges between the actuator and body of a valve

Buna-N® A DuPont Dow Elastomers registered trademark brand name of a type of elastomer seal; butyl material which has excellent resistance to gas permeation; an early vacuum seal, generally displaced by Viton®

Capture groove A counterbore in a flange that a gasket seats into; keeps a gasket from moving outside its range of correct positioning

Carriage The movable parts in a gate valve, including wheels, pins, springs, supports, etc.; the back side of the flat O-ring sealed gate in a gate valve

cc Cubic centimeter; metric unit of volume measurement

CC Connector circle; the center to center distance of two pins on the same diameter of an electrical connector

CCW Counterclockwise

CE Compliance European safety standard; similar to UL listing in the USA

CERN Centré Européenne pour la Recherche Nucléaire (French); European Organization for Nuclear Research; specifications standard limited to France

CF flange Del-Seal™ CF metal seal flange; originally developed by

- Varian Corporation under the Conflat® Flange brand name; requires metal gasket for UHV seal, usually copper material
- CIF** Carriage and Insurance paid to customer's delivery address
- Clearance holes** Holes that are drilled completely through a metal piece without threads; also called through holes or thru holes
- Counterbore** A straight bore partially through a metal piece; sometimes concentric with a smaller bore
- CSA** Canadian Standards Association; comparable to United Laboratories approval in the USA
- CSR** Customer Service Representative
- CVD** Chemical vapor deposition; a method of depositing material on a substrate using a chemical reaction
- CW** Clockwise
- DC** Direct current
- Del-Seal™** The MDC trademark name for a metal seal UHV flanges; also written Del-Seal™ CF; compatible with Conflat® flanges
- DIA or dia** Diameter
- Dicronite** A dry film lubricant used on linear and ball bearings; modified tungsten disulfide in lamellar form; inert, corrosion resistant, non-magnetic and UHV compatible throughout a wide temperature range
- DIN** Deutsche Industrie Norm (German); German industry standard
- Display Resolution** The smallest motion detectable by a motion device's precision rule, micrometer or motor controls
- DN** Diamètre Nominal (French); nominal diameter, usually referring to vacuum tubing internal diameter
- DWDM** Dense Wavelength Division Multiplexing; the process of splitting or multiplexing the light traveling through fiber (optics) into different wavelengths
- EB, E-B, e-beam or other variations** Electron beam
- Eccentricity** Sometimes called concentricity; eccentricity in a rotary device is the deviation of the center of rotation from its mean position as the device turns
- Elastomer** A flexible material for completing a vacuum seal between two flat surfaces, usually ISO flanges; colloquially "rubber"
- Electropneumatic** Method of actuating a device using a compressed gas which is controlled by an electrical solenoid valve
- Electropolish** Removes a small amount of surface metal from any shape of stainless steel; provides an attractive high-luster finish plus deburring
- Error** The difference between an obtained performance parameter and the ideal or desired result. Errors fall into two primary categories, on-axis and off-axis errors
- Fixed flange** Nonrotatable; composed of a single machined piece; when welded to tubing or a chamber, the bolt holes cannot be rotated to align with bolt holes of another flange
- Flush mount** One flange is welded directly to the back of either another larger flange or a flat surface; typically the total thickness is the sum of the two individual thicknesses
- FOB** Freight on board; the point at which transfer of ownership of a product occurs
- FPT** Commonly used abbreviation for female pipe thread
- Friction** Friction is defined as the resistance to motion between surfaces in contact. Friction can be constant or it can vary with speed. Elements contributing to overall friction may be in the form of drag, sliding friction, system wear or lubricant viscosity
- Friction, Static** The friction that must be overcome to impart motion to a body at rest. Since static friction is higher than sliding friction, the force which must be applied to impart motion is greater than the force required to keep the body in motion. As a result, when a force is initially applied, the body will begin to move with a jump in some unpredictable and unrepeatable manner, producing non-linear, non-repeatable motion
- FT or ft** Foot; unit of length measurement
- F/T or f/t** Abbreviation for feedthrough
- Gasket** Any material between two sealing surfaces; either metal or elastomer material; typically rectangular in cross-section but may also be circular in cross-section
- Gate** The flat plate in a gate valve that makes a seal between the two sides of a valve; includes a groove to hold an elastomer O-ring that completes the seal
- Gear Ratio, Drive Train** A motion instrument's drive train gear ratio is the relationship between received input motion and the delivered output motion. Ratios are expressed in the numerical notation a:b, where "a" represents the received motion or device input in revolutions or some other unit, and "b" represents the delivered or resulting output motion in revolutions for rotary devices or 1" of travel in linear motion instruments
- gpm** Gallons per minute; unit of liquid volume flow
- gps** Gallons per second; unit of liquid volume flow
- Graded seal** The portion of a glass component that changes from one material to another; typically the transition from Pyrex® to quartz tubing
- HF** High frequency; the range of frequencies in the radio spectrum between 3 and 30 megahertz
- HV** High vacuum; typically between 10⁻³ to 10⁻⁸ Torr
- Hybrid** A combination of two different methods of sealing, such as metal seal to elastomer seal; an adapter
- Hysteresis** The difference in the absolute position of an object for a given commanded input when approached from opposite directions. It is due to elastic forces accumulated in various drivetrain components, leadscrew wind-up, for instance. Often confused with backlash
- Hz** Hertz; cycles per second



- ID** Internal diameter or inner dimension; usually of tubing or a hollow bore through a metal piece
- IEEE** Institute of Electrical and Electronics Engineers
- IGT** Ionization gauge tube; used with a gauge to measure pressure
- J or Joule** The SI unit of work or energy; newton-meter
- Insert** Part of a rotatable flange; the smaller part of a rotatable flange that is welded to a tube; includes the sealing knife-edge; requires a receiver to complete a vacuum seal
- ISO** International Standards Organization
- Kalrez® 4079** A perfluoroelastomer useful in corrosive or high temperature applications
- Kapton®** The DuPont Dow Elastomers registered trademark brand name of a UHV compatible polyimide film typically used for wire insulation; provides an extremely tough abrasion resistant and tenacious insulator
- KF flange** The smaller ISO flanges; originally Klein Flange developed in Germany, “Klein” meaning small; Kwik-Flange™ is the MDC trademark name for the smaller components of a complete ISO flange family
- Knife-edge** The sealing detail on a metal seal flange; the portion of a metal seal flange that bites into a gasket between two identical size flanges
- Kovar® - Alloy 29-17** The Carpenter Technology registered trademark brand name of a highly magnetic nickel-iron alloy; provides a transition between stainless steel and glass materials in viewports or other components; has a phase shift at -80°C and therefore not suitable for cryogenic applications
- kV** Kilovolts; measurement of electrical voltage
- kW** Kilowatts; measurement of electrical power
- LB or lb** Pound; unit of weight measurement
- LB_f or lb_f** Pound; unit of force measurement; frequently the “f” is omitted when the context is clear
- lb-ft** Pound-foot; unit of torque measurement; sometimes written lb_f-ft
- LCD** Liquid crystal display; typically used on instrumentation
- Leak check grooves** Narrow radial grooves machined into a metal seal flange between the outer surface and the capture groove for a gasket; typically not on flanges larger than 10" OD
- LF flange** The larger ISO flanges; Large-Flange™ is the MDC trademark name for the larger components of a complete ISO flange family
- Live length** The portion of a bellows that can provide motion; the convoluted portion of a formed bellows
- LN₂ or LN** Liquid nitrogen
- Load Capacity, Stage** The maximum centered load that can be placed directly on an XYZ motion stage and is typically limited by the load capacity of the bearings
- Load Capacity, Lateral or Moment** Also called side or bending load capacity, it is the maximum load that can be applied perpendicular to a shaft's axis of motion
- Load Capacity, Axial** The maximum centered and balanced compressive or tensile load that can be applied to a stage's or shaft's longitudinal or parallel axis of motion.
- Load-Lock** A method of introducing product into a vacuum chamber via an intermediate chamber; allows sample manipulation without significantly affecting the vacuum of the main chamber
- LV** Low vacuum; typically between atmosphere and 10⁻³ Torr
- Matte finish** A bead blast finish on standard tubing
- MAX or max** Maximum
- MESA** Modular Equipment Standards Architecture; replaced by MESC
- MESC** Modular Equipment Standards Committee
- MHV** Miniature high voltage; used in medium power applications; similar to BNC series, but do not intermate with BNC
- micron** unit of length equal to .000001 meter
- mil** unit of length equal to .001 inch
- min** Minimum or minute, depending on context
- Minimum Incremental Motion** The smallest motion a device is capable of delivering reliably, not the smallest display resolution increment
- MPI** Mechanical position indicator; available on most electro-pneumatic valves; utilizes mechanical microswitches to provide open/closed circuits which may be used for position indication, interlock circuitry, etc.; requires customer wiring
- MPT** Commonly used abbreviation for male pipe thread
- Mu-metal** A composite of rare earth metals used to provide a magnetic shield around sensitive instrumentation
- NEMA** National Electrical Manufacturers Association
- NIST** National Institute of Standards and Technology
- Nominal** The approximate or rounded-off dimension used to designate the size of an object, such as a flange or tube; abbreviated “Nom.” or “nom.”
- Nonrotatable** A flange machined from a single piece of material; once welded to tubing or a chamber, the bolt holes are no longer rotatable for alignment purposes
- NPT** National Pipe Taper; a specific taper to a threaded hole which provides a pressure seal between male and female threads; sometimes referred to as National Pipe Thread
- NW** Nenn Weite (German); nominal diameter, usually referring to vacuum tubing internal diameter
- OD** Outside diameter or outer dimension; usually of tubing or any circular or spherical piece, but can also apply to any shape
- OEM** Original equipment manufacturer
- OFE copper** Oxygen free electronic grade copper; also called oxy-

- gen free electrolytic or simply oxygen free; replaces OFHC
- OFHC copper** Oxygen free, high conductivity; a trade name for vacuum compatible copper that is no longer being manufactured; replaced by OFE copper
- O-ring** An elastomer vacuum seal available in various materials; torus or doughnut shaped, typically circular in cross-section; may be a dynamic or static seal
- oz** Ounce; unit of weight measurement
- oz_f** Ounce; unit of force measurement; frequently the “**f**” is omitted when the context is clear
- oz-in** Ounce-inch; unit of torque measurement
- PEEK** Polyether-etherketone; a high-temperature resistant thermoplastic that is vacuum compatible; suitable for wire coating, injection molding, film and advanced composite fabrication
- pf** Picofarad; unit of electrical capacitance measurement
- PI** Position indicator; available on most valves; utilizes stationary magnetic Reed switches and a moveable magnet
- Pitch** The spacing of threads on a shaft; related to threads per inch
- Play** Uncontrolled movement due to looseness of mechanical parts. Usually increases with the components age. Play is a contributor to backlash
- Poppet** The movable portion of an angle valve; includes a groove to hold an elastomer O-ring which completes the seal
- Position Stability** The ability to maintain a constant position over time. Variation from stable position is called drift. Contributors to drift include worn parts, migration of lubricant, and thermal variation
- Precision** Also known as repeatability, it is the range of deviations in output position that will occur for 95% of the motion excursions from the same error-free input. Accuracy and precision are not the same
- PSI** Pounds per square inch; unit of pressure measurement
- PSIA** Pounds per square inch absolute; pressure measured with respect to zero pressure
- PSIG** Pounds per square inch gauge; pressure measured with respect to that of the atmosphere
- PTFE** Polytetrafluorethylene; self-lubricating, non-compressible, inert and low outgassing material for dynamic seals
- PVC** Polyvinyl chloride; typically used in low vacuum applications such as roughing lines
- PVD** Physical vapor deposition; a method of depositing material on a substrate using evaporation
- QMS** Quadrupole mass spectrometer
- Quad-Ring** An elastomer used in dynamic seals; typically “U” shaped in cross-section
- Receiver** Part of a rotatable flange; the larger outer part of a rotatable flange that includes bolt holes; may be rotated to align bolt holes prior to completing a vacuum seal
- Reducer** A fitting that changes diameter from one size to another within a single method of sealing, such as metal seal to metal seal; contrasted with Adapter
- Repeatability** The ability of a motion instrument to reliably achieve a commanded position over many attempts regardless of the direction from which the position is approached
- RF** Radio frequency
- RGA** Residual gas analyzer
- RMS** Root-mean-square; a calculation to determine an average of fluctuating values; electrical or surface finish measurement
- Roll-up** A cylindrical shaped section of stainless steel that is welded internally for vacuum integrity and stitch welded externally for strength; for vacuum chambers or “tubing” greater than 10 inches in outer diameter
- Rotatable flange** Composed of two machined pieces: an insert and a receiver; used for bolt hole alignment only; the insert is welded to tubing and the receiver slides over the insert; the receiver bolt holes can be rotated to align with bolt holes of another flange, once bolts are inserted the receiver cannot be rotated
- RPM or rpm** Revolutions per minute; measurement of rotational speed
- Runout** The linear, not angular, portion of off-axis error. It is the deviation between ideal straight line motion and actual measured motion in a translation stage. Runout has two orthogonal components, straightness, a measure of in-plane deviation, and flatness, the out-of-plane deviation
- SAE** Society of Automotive Engineers
- SEMI** Semiconductor Equipment and Materials International
- Sensitivity** The minimum input required to produce output motion or the ratio between output motion and input drive; applicable particularly to manually actuated motion devices
- Setback** The distance from the sealing face of a flange to the tubing counterbore
- SHV** Safe high voltage; similar to MHV series, except SHV cable connector center contacts do not protrude from connector ends which makes them safer in a disconnected condition
- SI** Système International d’Unités (French); unified system of measurement including the metric system, electrical units such as Amperes, Volts, etc.
- Spring rate** The amount of force required to compress a guided bellows one linear inch; given in pounds per inch (lbs/in)
- Squirm** Arbitrary lateral movement of a bellows
- SS, SST, ss or sst** Abbreviation for Stainless Steel, any grade
- Stainless steel** In general, an iron-chromium alloy; corrosion resistance is enhanced by the addition of nickel
- Static bend radius** The minimum radius a bellows can be curved without encountering permanent deformation
- Std Atm cc/sec He** Leak rate measurement



Swagelok® The Swagelok Company registered trademark brand name tube fitting providing UHV compatible connections on fractional inch tube sizes; uses a compressible ferrule; requires clean tube end only

Tangents Lengths of straight tubing added to elbows so that centerlines of straight sections are tangent to curved centerline

Tapped holes Drilled holes that have female threads cut into them; also called threaded holes

TC Thermocouple; method of measuring heat and therefore indirectly measuring vacuum pressure

Temp or temp Abbreviation for temperature

Threaded holes Drilled holes that have female threads cut into them; also called tapped holes

Through or Thru holes Drilled holes that are smooth and completely through the material; also called clearance holes

TIG Tungsten inert gas; a method of welding which keeps the weld shielded from corrosive atmosphere by bathing the area with an inert gas during the process

Tilt The angular portion of off-axis error. It is the deviation between ideal straight line motion and actual measured motion in a translation stage. Tilt and wobble have three orthogonal components commonly referred to as roll, pitch, and yaw

Torr A unit of pressure measurement; one atmosphere equals 760 Torr; sometimes written torr

TSE Technical Sales Engineer

Typ or typ Typical; applies to all occurrences of a feature

Type-D Subminiature feedthrough Based on MIL-C-24308 specifications for pin arrangements; identified by a "D" or key-stone shape

Type N feedthrough Low instrumentation voltage feedthrough for matched 50 ohm impedance rating applications

UHV Ultrahigh vacuum; defined by the American Vacuum Society as the pressure range between 7.5×10^{-10} to 7.5×10^{-13} Torr; British and German standards define UHV as 10^{-8} Torr or better

UL Underwriter's Laboratories; typically a stamp of approval for acceptable electrical safety standards in the USA

UNC Unified National Coarse; referring to bolt threads

UNF Unified National Fine; referring to bolt threads

UNS Unified Numbering System

UPS United Parcel Service; see Ordering Information section

UTA A common abbreviation for Up-to-Air

V Volt; unit of electrical voltage

VAC Alternating current voltage

VCR® The Swagelok Company registered trademark brand name tube fitting providing UHV compatible connections on fractional inch tube sizes; uses a replaceable metal gasket; requires mating connector installed on tubing

VDC Direct current voltage

VespeI® The DuPont Dow Elastomer registered trademark brand name of a high vacuum compatible polyimide material used for bearings; may be used without lubrication

Viton® The DuPont Dow Elastomers registered trademark brand name of a fluorocarbon elastomer; first introduced in the 1950s; wide use in vacuum applications

WDM xxxxx

Wobble The angular deviation of the axis of rotation over one complete revolution

WT or wt Weight

WxHxD Rectangular dimensions

XHV Extreme high vacuum; defined by the American Vacuum Society as below 7.5×10^{-13} Torr

Yield point xxxx

Zero-length Any flanged device that has a total overall thickness equal to the thickness of the flange itself

& ampersand; the symbol for "and"

@ the symbol for "at"

°C degrees Centigrade or Celsius; unit of temperature

°F degrees Fahrenheit; unit of temperature

μ Mu; unit of magnetic permeability; also the symbol for micron as μin , micro-inch

the symbol for "number" or "pound" weight, depending on context

Ω Omega; ohm, unit of electrical resistance or impedance





Reference Page

The number symbol refers to the various sizes within a single model reference number, usually a flange or tube size.

Numbered References

#-#CRNF	134
#-1	63
#-2	64
#-2L	66
#-2L-HC	67
#-2L-NF	138
#-2LHCNF	139
#-2LL	67
#-2LL-NF	139
#-3	68
#-3-#	69
#-3-#NF	141
#-3-NF	140
#-4	70
#-4-#	71
#-4-#NF	143
#-4-NF	142
#-45L	66
#-45L-NF	138
#-4S-NFS	142
#-4T-NF	142
#-5	72
#-5-NF	144
#-6	73
#-6-NF	145
#-VG	290
#-X	68, 441
#FPT-#	158
#x#	61

A

ABI-32	451
ABLM	397
ABME-1	451
ABRM	381
AC	452
AC04-4	451
ACS-22	451
ACT-3	451
AG-150	440
ALM-275	399
ALMB-1	452
ALME-1	452
AM48-1-S	450
ASA	131
ASA#-#	151

Reference Page

ASA#-OR-#	151
ASABA	131
ASAOR	131
ASI	452
AUJ-3	450
AV-023	201
AV-050	201
AV-075	203
AV-100	205
AV-150	207
AV-200	209
AV-250	211
AV-300	213
AV-400	215
AV-600	217
AV-800	219
AV-1000	221
AVG	201-221

B

B	147
BA	29-59
BA-#-12-SP	171-185, 205-219, 225-233, 237
BA-#-SP	169, 187, 189, 201, 203, 221, 223, 237
BA-RGV	193
BAIR	295
BATT	295
BDA-M	284
BDA-P	284
BFV	241
BFVG	241
BLM	387
BMB-1	448
BML-1	448
BNC	325
BP	479
BQD-#-CH	438
BRLM	403
BRM	379
BW	479

C

CB	343, 347, 356
CCF	325, 355
CCG	325, 355
CE	343
CF	75
CRPP	406
CS10	347, 356
CS20	347, 356
CU#-6	73

Reference Page

D	
D9	349, 351
D15	349, 351
D25	349, 351
DB	147
DBF	156
DC	95-111, 211-221, 231-233
DCM-SC-12	464
DCM-SC-90	464
DDRM-275	385
DEG	314
DFT-#	251
DFT-#-2	251
DFT-#-2LN	255
DFT-#-LN	255
DFT-#F	253
DG-275	409
DG-275-BJ	408, 409
DGCS	351
DOW DC-150	285
DS	147

E

E-GV-625	169
E-GV-1500	171
E-GV-2000	173
E-GV-2500	175
E-GV-3000	177
E-GV-4000	179
E-GV-5000	181
E-GV-6000	183
E-GV-8000	185
E-MLV	238
E-ULV	239
EAG	354
EP-1	285
ER	449

F

F##-1R	65
F#-V	283
F133	29
F218	31
F275	33
F338	35
F450	37
F458	39
F600	41
F675	43
F800	45
F1000	47
F1200	49

Reference Page

F1325	51
F1400	53
F1650	55
F1x8	435
FB	136
FBB	161
FBNC	325
FBS	161
FBW	137
FC	29-47
FCR#-#	65
FD	57-59, 282
FDS	156
FEL-PRO C-102	285
FGA	316
FGC	441
FGT-1125	159
FHC-400	338
FHC-1000	339
FMHV	327
FOR-1	444
FRL	264, 268, 277
FRL-#SWG	276
FRL-#VCR	274
FRL-075	272
FRM-125	384
FTC	477
FTCO	477

G

GA	313
GB-1	448
GK	29-59
GT	421
GV-625	169
GV-1500	171
GV-2000	173
GV-2500	175
GV-3000	177
GV-4000	179
GV-5000	181
GV-6000	183
GV-8000	185
GV-10000	187
GV-12000	189
GVBA-#-SP	175-189
GVBB	175-181
GVG-625	169
GVG-1500	171
GVG-2000	173
GVG-3000	177
GVG-4000	179
GVG-5000	181
GVG-6000	183
GVG-8000	185
GVG-10000	187
GVG-12000	189
GVG-2500	175



Reference	Page	Reference	Page	Reference	Page	Reference	Page
H							
HCC-750	335, 355	K#-DDRM	385	KDFT-#-2	251	LAV-300	213
HLM-275	398	K#-FBNC	325	KDFT-#-2LN	255	LAV-400	215
HTBLM	388	K#-FMHV	327	KFC	87-93	LAV-600	217
HTBRM	380	K#-HPV	160, 262	KFRL	266	LAV-800	219
HVC	337	K#-HVC	337	KFRL-075	273	LAV-1000	221
HVE	333, 337, 356	K#-IF10	347	KGA	313	LBA	95-111
<hr/>							
I							
IF10-#	347	K#-IF20	347	KGV-625	169	LF-#	359
IF20-#	347	K#-IM	331	KGV-1500	171	LF-#VCR	361
IGT	299	K#-LF	359	KGV-2000	173	LF-BP	359
ILEC-059	354	K#-LFVCR	361	KIV-075	223	LF-VCR-BP	361
ILEC-120	354	K#-LN	363	KIV-100	225	LFRL	266
ILEC-260	333, 354	K#-LNVCR	365	KIV-150	227	LGV-2500	175
ILPC	333, 355	K#-LWS	114	KIV-200	229	LGV-3000	177
IM50-#	331	K#-LWSA	114	KMST-#-2	247	LGV-4000	179
IV-075	223	K#-MBR	382	KRYTOX LVP	285	LGV-6000	183
IV-100	225	K#-MC	333	KSEG	315	LGV-8000	185
IV-150	227	K#-MC600	335	KTX-#-2	249	LGV-10000	187
IV-200	229	K#-MCT	333	KVP	306-309	LGV-12000	189
IV-250	231	K#-MCT600	335	<hr/>			
IV-300	233	K#-MHV	327	L			
IVG	223-233	K#-PUMP	160	L#-1	115	LIV-250	231
<hr/>							
K							
K#-1	114	K#-PVC-#	262	L#-2	116	LIV-300	233
K#-10KW	341	K#-RHA	160	L#-2L	122	LLC	433
K#-2	116	K#-SHV	329	L#-2L-HC	123	LLR	435
K#-2L	122	K#-SWG	154	L#-2LL	123	LMD	389
K#-2LL	123	K#-SWS	114	L#-2LM	122	LMM-275	402
K#-3	124	K#-V	283	L#-2LR	122	LMT	423
K#-3-K#	125	K#-VCR	155	L#-3	124	LMTA	419
K#-35KW	341	K#-VG	290	L#-3-K#	125	LN-#	363
K#-4	126	K#-WS	410	L#-3-L#	125	LN-#VCR	365
K#-4-K#	127	K#-WWC	113	L#-4	126	LN-BP	363
K#-45L	121	K#-X	117	L#-4-K#	127	LN-VCR-BP	365
K#-5	128	K#-X-10	117	L#-4-L#	127	LVHC	191
K#-6	129	K#-XT-10	117	L#-45L	121	LVHC-DCK	191
K#-8	345	K#x#	118, 150	L#-5	128	LVHC-SCK	191
K#-ABLM	397	K#x#FPT	158	L#-6	129	LVHCG	191
K#-ABRM	381	K#x#MPT	159	L#-BL	115	LVP	306
K#-BLM	387	K#xASA#	152	L#-CE	343	LXY	417
K#-BNC	325	K#xASA#-OR	152	L#-CFC	95-103	<hr/>	
K#-BPFT	161	K#xDS	157	L#-CR	211-221, 231-233	M#-#-SP	169-189
K#-BRLM	403	K#xK#FCR	120	L#-WWC	113	MAF	74
K#-BRM	379	K-CRPP	406	L#-X	117	MAV	236
K#-C	169-173, 201-209, 223-229	K050	87	L#x#	150	MAVG	237
K#-CB	343	K075	87	L#xASA#	152	MBL-133	391
K#-CR	169-173, 201-209, 223-229	K075-MBL	391	L#xASA#-OR	152	MBR	382
<hr/>							
L							
KDEG	314	K075-RPLM	395	L250	95	MC-150	333
<hr/>							
M							
		K075-SBLM	393	L300	97	MC-600	335
		K100	89	L400	99	MC-8	345
		K150	91	L600	101	MCT-150	333
		K150-DG	409	L800	103	MCT-600	335
		K150-SU	407	L1000	105	MFDS	156
		K150-VGU	408	L1200	107	MHV	327
		K200	93	L1600	109	MIV	237
		KAP	353	L2000	111	MIVG	237
		KAP-R9	350, 351	LAV-250	211	MLV	238
		KAP-R15	350, 351	<hr/>			
		KAP-R25	350, 351	M			
		KAV-050	201	M#-#-SP	169-189	MLV-ND	238
		KAV-075	203	MAF	74	MM-1	449
		KAV-100	205	MAV	236	MMC	333
		KAV-150	207	MAVG	237	MMC-8	345
		KAV-200	209	MBL-133	391	MMCT	333
		KBFV	241	MBR	382	<hr/>	
		KDEG	314	MC-150	333	<hr/>	



Reference	Page
MMF	75
MOM-1	449
MRM-275	384
MST-#	247
MST-#-2	247
MST-C	247
MST-H	247
MT	437
MTM	437

O

OR	475
----	-----

P

PA-25	442
PAC	442
PAT	442
PBRM1	383
PBRM2	405
PCM-1	446
PLG-112	282
PN	29-45
POEC-050	345, 354
POEC-060	354
POEC-094	325-331, 337, 354
POEC-250	333, 354
PSM	425
PSMA	427
PSML	427
PVC-#	262
PVC-K#-3	280
PVC-K#-45L	281
PVC-K#-90L	281
PVC-K#-C	280
PVC-K#-W	279
PVCC-1000	278
PVCP-1000	278
PVCT	279
PVP	310

Q

QD	439
----	-----

Reference	Page
R	
RAPC	333, 355
RF-10KW	341
RF-35KW	341
RG-1	448
RGV	193
RGVG	193
RMTG	429
RPLM	395

S

S	147
S-1	449
S-2	449
SAM	444
SAM-M	445
SAM-S	445
SBLM	393
SC	95-111
SEG	315
SH-1	447
SHV	329
SLM-275	400
SM13-HV	462
SM13-UHV	463
SM23-HV	462
SM23-UHV	463
SMC-1	465
SMC-M	465
SMP	447
SMS-1	448
SP-150	259
SPD-150	258
SPH-150	258
SPMS-150	258
SPS-2-150	259
SPS-3-150	259
SSAC	483
SSBJ	475
ST	133
STA	445
SU-275	407
SWG	154

T

TC-CRIMP	347, 354
TFA-1	64
TGT	293
TLM-275	401
TPR	284
TX-#	249
TX-#-2	249

TYPE L	285
TYPE M	285

U

UB-FRL	265, 269, 277
UB-FRL-#SWG	276
UB-FRL-#VCR	275
UB-FRL-075	272
UB-FRLT	265, 269
UB-KFRL	267
UB-KFRL-075	273
UB-KFRLT	267
UB-LFRL	267
UBJ-1	447
UHIR	297
UHRI	297
UHRT	297
UHTT	297
ULV	239
ULV-SA	239
URC-1	446
URC-2	447

V

VAV-025	201
VCR	155
VG	290
VGU-275	408
VP	306-309
VPS	311
VSCA-18	258

W

WB	135
WBA	77
WGK	77
WK-1	449
WS	410
WSF	77

X

XY	417
----	-----

Size Ref's

Ref	Del-Seal™ flange
133	1-1/3" flange
218	2-1/8" flange
275	2-3/4" flange
338	3-3/8" flange
450	4-1/2" flange
458	4-5/8" flange
600	6" flange
675	6-3/4" flange
800	8" flange
1000	10" flange
1200	12" flange
1325	13-1/4" flange
1400	14" flange
1650	16-1/2" flange

Ref	Vacuum Tubing
025	1/4" O.D.
037	3/8" O.D.
050	1/2" O.D.
075	3/4" O.D.
100	1" O.D.
125	1-1/4" O.D.
150	1-1/2" O.D.
175	1-3/4" O.D.
200	2" O.D.
250	2-1/2" O.D.
300	3" O.D.
400	4" O.D.
600	6" O.D.
800	8" O.D.
1000	10" O.D.
1075	10-3/4" O.D.

Part	Page	Part	Page	Part	Page	Part	Page	Part	Page	Part	Page
170078	151	180027	77	190096	37	191007	35, 58	300009	189	303015	177
170079	151	180028	77	190097	41	191008	35, 58	300010	173	303016	179
170080	151	180029	77	190098	45	191009	37, 58	300011	169	303017	181
170081	151	180030	77			191010	37, 58	300012	171	303018	183
170082	151	180031	77			191011	39, 58	300013	173	303019	185
170083	151	180032	77			191012	39, 58	300014	175	304000	175
170084	151	180033	77			191013	41, 58	300015	177	304001	177
170085	151	180034	77			191014	41, 58	300016	179	304002	179
170086	151	180035	77			191015	43, 58	300017	181	304003	181
170087	151			190100	131	191016	43, 58	300018	183	304004	183
170088	151			190101	131	191017	45, 59	300019	185	304005	185
170089	151			190102	131	191018	45, 59	301000	169	304006	187
170090	151			190103	131	191019	47, 59	301001	171	304007	189
170091	151			190104	131	191020	47, 59	301002	175	304008	189
170092	151	190000	29	190110	175-181	191021	51, 59	301003	177	305000	175
170093	151	190001	29	191111	57	191022	51, 59	301004	179	305001	177
170094	151	190002	31, 33	191012	57	191023	51, 59	301005	181	305002	179
170095	151	190003	35-43	191013	57	191024	53, 59	301006	183	305003	181
170096	151	190004	31, 33	191014	58	191025	53, 59	301007	185	305004	183
170097	151	190006	35	191015	58	191026	53, 59	301008	187	305005	185
170098	151	190007	37-41	191016	58	191027	55, 59	301009	189	305006	187
170099	151	190008	39-45	191017	58	191028	55, 59	301010	173	305007	189
170100	151	190010	45, 47	191018	58	191029	55, 59	301011	169	305008	189
170101	151	190011	47	191019	59	191050	77	301012	171	306000	169
170102	151	190012	51, 53	191020	59	191051	77	301013	173	306001	171
170103	151	190013	51, 53	191021	59	191052	77	301014	175	306002	173
170104	151	190014	55	191022	59	191053	77	301015	177	306003	175
170105	151	190015	55	191023	438	191054	77	301016	179	306004	177
170106	151	190016	77	191024	438	191055	77	301017	181	306005	179
170107	151	190017	77	191025	438	191056	77	301018	183	306006	183
170108	151	190018	77	191026	438	191070	49	301019	185	306007	185
170109	151	190019	77	191027	438	191094	49	302000	169	306008	187
170110	151	190020	77	191028	438	191147	33	302001	171	306009	189
170111	151	190021	77	191029	438			302002	175	307000	169
170112	151	190037	29, 223, 237	191055	29			302003	177	307001	171
170113	151	190040	31, 33	191056	33			302004	179	307002	173
170114	151	190041	31, 33	191057	35	192000		302005	181	307003	175
170115	151	190043	35	191058	37	192007	45	302006	183	307004	177
170116	151	190044	35-43	191059	41	192008	47	302007	185	307005	179
		190045	37-41	191060	45	192020	29	302008	187	307006	183
		190046	39-45	191061	47	192021	31	302009	189	307007	185
		190047	45, 47	191062	49	192022	33	302010	173	307008	187
		190048	47	191063	49	192023	35	302011	169	307009	189
		190049	33	191064	49	192024	37	302012	171		
		190050	35	191065	49	192025	39	302013	173		
		190051	37	191066	310, 475	192026	41	302014	175		
		190052	45	191067	169	192027	87	302015	177		
		190053	41	191068	171	192028	89	302016	179	310000	
		190055	29, 169	191069	175-179	192029	91	302017	181	310015	203
		190057	31, 33, 171	191070	175-181	192030	93	302018	183	310021	203
		190058	35-43, 175-181	191071	183, 185			302019	185	310022	205
		190059	45, 47, 183, 185	191072	183-187					310028	205
		190060	51, 53, 221	191073	189					310029	207
		190061	31, 33, 205, 225,	191075	175, 177					310032	207
		190062	227, 237	191076	179, 181					310033	209
		190064	35, 229	191077	183, 185					310036	209
		190063	37-41, 211, 237	191078	187, 189					310037	211
		190064	39-45, 217	191080	39					310040	211
		190065	51, 53	191082	39	200000	483			310041	213
		190066	55	191084	39	200001	483			310044	213
		190067	47, 219	190506	187, 189					310045	215
		190068	55			300000				310048	215
		190069	29	191000		300000	169			310049	217
		190070	33	191001	29, 57	300001	171			310052	217
		190071	35	191002	29, 57	300002	175			310072	203
		190072	37	191003	31, 57	300003	177			310073	205
		190073	41	191004	33, 57	300004	179			310074	207
		190074	45	191005	33, 57	300005	181			310075	209
		190093	33	191006	33, 57	300006	183			310076	211
		190094	29			300007	185			310077	213
		190095	35			300008	187			310078	215



Part	Page	Part	Page	Part	Page	Part	Page	Part	Page	Part	Page
310079.....	217	313032.....	207	321029.....	231	350008.....	213, 233	401000		402037.....	65
310080.....	201	313033.....	209	321030.....	233	350010.....	217	401000.....	63	402038.....	65
310081.....	201	313036.....	209	321033.....	233	350011.....	219	401001.....	63	402039.....	65
310082.....	201	313037.....	211	321052.....	223	350012.....	221	401002.....	63	402040.....	65
310083.....	201	313040.....	211	321053.....	225	351004.....	205, 223, 225	401003.....	63	402041.....	65
310084.....	201	313041.....	213	321054.....	227	351005.....	207, 227	401004.....	63	402500.....	134
311015.....	203	313044.....	213	321055.....	229	351006.....	209, 229	401004.....	63	402501.....	134
311021.....	203	313045.....	215	321056.....	231	351007.....	211, 231	401005.....	63	402502.....	134
311022.....	205	313048.....	215	321057.....	233	351008.....	213, 233	401006.....	63	402503.....	134
311028.....	205	313049.....	217	322004.....	223	351010.....	217	401007.....	63	402504.....	134
311029.....	207	313052.....	217	322010.....	223	351011.....	219	401008.....	63	402505.....	134
311032.....	207	313053.....	219	322011.....	225	351012.....	221	401009.....	63	402506.....	134
311033.....	209	313056.....	219	322017.....	225	351013.....	237	401010.....	63	402507.....	134
311036.....	209	313068.....	221	322018.....	227	351014.....	237	401020.....	63	402508.....	134
311037.....	211	313069.....	221	322021.....	227	351015.....	237	401021.....	63	402509.....	134
311040.....	211	313070.....	201	322022.....	229	354000.....	169	401022.....	63	402510.....	134
311041.....	213	313071.....	201	322025.....	229	354001.....	171	401023.....	63	402511.....	134
311044.....	213	313072.....	201	322026.....	231	354002.....	175	401024.....	63	402512.....	134
311045.....	215	313073.....	201	322029.....	231	354003.....	177	401025.....	63	402513.....	134
311048.....	215	314000.....	236	322030.....	233	354004.....	179	401026.....	63	402514.....	134
311049.....	217	314001.....	236	322033.....	233	354006.....	181, 183	401027.....	63		
311052.....	217	314002.....	236	323004.....	223	354007.....	185	401028.....	63		
311053.....	219	314003.....	236	323010.....	223	354008.....	187	401029.....	63		
311056.....	219	314004.....	236	323011.....	225	354009.....	189	401030.....	63		
311072.....	203	314005.....	236	323017.....	225	355000.....	169	401031.....	63		
311073.....	205	314006.....	236	323018.....	227	355001.....	171	401032.....	63		
311074.....	207	314007.....	236	323021.....	227	355002.....	175	401033.....	63		
311075.....	209	315000.....	238	323022.....	229	355003.....	177	401034.....	63		
311078.....	211	315001.....	238	323025.....	229	355004.....	179	401035.....	63		
311079.....	213	315002.....	238	323026.....	231	355006.....	181, 183	401036.....	63		
311080.....	215	315003.....	238	323029.....	231	355007.....	185	401037.....	63		
311081.....	217	315010.....	239	323030.....	233	355008.....	187	401038.....	63		
311082.....	219	315011.....	239	323033.....	233	355009.....	189	401039.....	63		
311083.....	221	315012.....	239					401040.....	63		
311084.....	221	315013.....	239					401041.....	63		
311085.....	221	316000.....	237					401042.....	63		
311087.....	201	316001.....	237					401043.....	63		
311088.....	201	316002.....	237					401044.....	63		
311089.....	201	316003.....	237					401045.....	63		
311090.....	201							401046.....	63		
311091.....	201										
		320000		330000		360000		402000			
312000		320004.....	223	330001.....	191	360000.....	241	402000.....	64		
312015.....	203	320010.....	223	330004.....	191	360001.....	241	402001.....	64		
312021.....	203	320011.....	225	330005.....	191	360002.....	241	402002.....	64		
312022.....	205	320017.....	225	330006.....	191	360010.....	241	402003.....	64		
312028.....	205	320018.....	227	330101.....	191	360011.....	241	402004.....	64		
312029.....	207	320021.....	227	330102.....	191	360012.....	241	402005.....	64		
312032.....	207	320022.....	229	330103.....	191	360013.....	241	402006.....	64		
312033.....	209	320025.....	229	331000.....	193	360500.....	241	402007.....	64		
312036.....	209	320026.....	231	331001.....	193	360501.....	241	402008.....	64		
312037.....	211	320029.....	231	331002.....	193	360502.....	241	402009.....	64		
312040.....	211	320030.....	233	331003.....	193	360503.....	241	402010.....	64		
312041.....	213	320033.....	233	331004.....	193			402011.....	65		
312044.....	213	320052.....	223	331005.....	193			402012.....	65		
312045.....	215	320053.....	225	331012.....	193			402013.....	65		
312048.....	215	320054.....	227	331013.....	193			402014.....	65		
312049.....	217	320055.....	229	331101.....	193			402015.....	65		
312052.....	217	320056.....	231	331102.....	193			402016.....	65		
312053.....	201	320057.....	233	331103.....	193			402017.....	65		
312054.....	201	321004.....	223	331104.....	193			402018.....	65		
312055.....	201	321010.....	223	331105.....	193			402019.....	65		
312056.....	201	321011.....	225	331106.....	193			402020.....	65		
313015.....	203	321017.....	225	331107.....	193			402021.....	65		
313021.....	203	321018.....	227	331108.....	193			402022.....	65		
313022.....	205	321021.....	227					402023.....	65		
313028.....	205	321022.....	229					402024.....	65		
313029.....	207	321025.....	229					402025.....	65		
		321026.....	231					402026.....	65		
				350000							
				350004.....	205, 223, 225						
				350005.....	207, 227						
				350006.....	209, 229						
				350007.....	211, 231						

Part	Page	Part	Page	Part	Page	Part	Page	Part	Page
403516	138	404556	141	406000		409007	75	411105	147
403517	138	404557	141	406000	72	409008	75	411106	147
403521	138	404558	141	406001	72	409009	75	411107	147
403523	138			406002	72	409010	74	411108	147
403524	138			406003	72	409011	74	411109	147
403525	138			406004	72			411110	147
403530	139			406005	72			411111	147
403531	139	405000		406006	72			411112	147
403532	139	405000	70	406007	72	410000	147	411113	147
403540	139	405001	70	406008	72	410001	147	411114	147
403541	139	405002	70	406009	72	410002	147	411115	147
403542	139	405003	70	406010	72	410003	147	411116	147
403543	139	405006	70	406500	144	410004	147		
403544	139	405007	70	406501	144	410005	147		
403545	139	405008	70	406502	144	410006	147		
403546	139	405009	70	406503	144	410007	147	412000	
		405010	70	406504	144	410008	147	412000	156
		405031	70	406505	144	410009	147	412001	156
		405032	70	406506	144	410010	147	412002	156
		405033	70	406507	144	410011	147	412003	156
		405034	70	406508	144	410012	147	412004	156
404000	68	405035	70	406509	144	410013	147	412005	156
404001	68	405036	71	406510	144	410014	147	412006	156
404002	68	405037	71			410015	147	412007	156
404003	68	405038	71	407000		410016	147	412008	156
404007	68	405039	71	407000	73	410100	147	412009	156
404010	68	405040	71	407001	73	410101	147	412010	156
404038	68	405041	71	407002	73	410102	147	412011	156
404039	68	405042	71	407003	73	410103	147	412012	156
404040	68	405043	71	407004	73	410104	147	412013	156
404041	68	405044	71	407005	73	410105	147	412014	156
404042	68	405045	71	407006	73	410106	147		
404043	69	405046	71	407007	73	410107	147		
404044	69	405047	71	407008	73	410108	147	413000	
404045	69	405048	71	407009	73	410109	147	413000	156
404046	69	405049	71	407010	73	410110	147	413001	156
404047	69	405050	71	407500	145	410111	147	413002	156
404048	69	405051	71	407501	145	410112	147	413003	156
404049	69	405500	142	407502	145	410113	147	413004	156
404050	69	405501	142	407503	145	410114	147	413005	156
404051	69	405502	142	407504	145	410115	147	413006	156
404052	69	405503	142	407505	145	410116	147	413007	156
404053	69	405506	142	407506	145				
404054	69	405507	142	407507	145	411000		430000	
404055	69	405508	142	407508	145	411000	147	430000	249
404056	69	405509	142	407509	145	411001	147	430002	249
404057	69	405510	142	407510	145	411002	147	430003	249
404058	69	405539	142			411003	147	430005	249
404500	140	405540	142	408000		411004	147	430006	249
404501	140	405541	142	408000	73	411005	147	430008	249
404502	140	405542	142	408001	73	411006	147	430009	249
404503	140	405543	142	408002	73	411007	147	430011	249
404507	140	405544	143	408003	73	411008	147	430012	249
404510	140	405545	143	408004	73	411009	147	430014	249
404539	140	405546	143	408005	73	411010	147	430015	249
404540	140	405547	143	408006	73	411011	147	430017	249
404541	140	405548	143			411012	147	430018	249
404542	140	405549	143			411013	147	430020	249
404543	140	405550	143			411014	147	430050	249
404544	141	405551	143			411015	147	430051	249
404545	141	405552	143			411016	147	430052	249
404546	141	405553	143			411017	147	430053	249
404547	141	405554	143			411018	147	430054	249
404548	141	405555	143			411019	147	430055	249
404549	141	405556	143			411020	147	430062	249
404550	141	405557	143			411021	147	431000	247
404551	141	405558	143			411022	147	431001	247
404552	141			409000		411023	147	431003	247
404553	141			409004	75	411024	147	431004	247
404554	141			409005	74	411025	147		
404555	141			409006	74	411103	147		
						411104	147		

Index Part Number



Section 11.4

Part	Page	Part	Page	Part	Page	Part	Page	Part	Page
825049	127	840009	118	854005	107				
825050	127	840010	118	854006	109, 111				
826000	128	840011	118	854020	95				
826001	128	840012	118	854021	97, 99				
826002	128	840013	118	854022	101				
826003	128	840014	118	854023	103, 105				
826004	128	840015	118	854025	107				
826005	128	840016	120	854026	109, 111				
826006	128	840017	120						
826007	128	840018	120						
826008	128	840019	120						
827000	129	840020	120						
827001	129			930000					
827002	129			931585	238				
827003	129								
827004	129								
827005	129								
827006	129	850000							
827007	129	850000	95	950000					
827008	129	850001	99	950011	258				
		850002	101						
		850003	103						
		850004	105						
		850005	107						
		850006	109	991000					
		850007	111	991536	333, 355				
		850008	97	991537	333, 355				
		851000	115	991538	347, 354				
		851001	115	991539	345, 354				
		851002	115	991539-01	325-331,				
		851003	115		337, 354				
		851004	115	991540	333, 354				
		851005	115						
		851006	115						
		851007	115	9111000					
		851008	115	and up...					
		852000	95	Refer to ISI catalog					
		852001	99						
		852002	101						
		852003	103						
		852004	105						
		852005	107						
		852006	109						
		852007	111						
		852008	97						
		853000	95						
		853001	99						
		853002	101						
		853003	103						
		853004	105						
		853005	107						
		853006	109						
		853007	111						
		853008	97						
		853020	95						
		853021	99						
		853022	101						
		853023	103						
		853024	105						
		853025	107						
		853026	109						
		853027	111						
		853028	97						
				830000					
				830000	150				
				830001	150				
				830002	150				
				830003	150				
				830004	150				
				830005	150				
				830006	150				
				832000	119				
				832001	119				
				832002	119				
				832003	119				
				832004	119				
				832005	119				
				832006	120				
				832007	120				
				832008	120				
				832009	120				
				832010	120				
				833000	152				
				833001	152				
				833002	152				
				833003	152				
				833004	152				
				833005	152				
				833006	152				
				833007	152				
				833008	152				
				833009	152				
				833010	152				
				833011	152				
				833012	152				
				833013	152				
				840000					
				840000	118				
				840001	118				
				840002	118				
				840003	118				
				840004	118				
				840005	118				
				840006	118				
				840007	118				
				840008	118				
				854000					
				854000	95				
				854001	97, 99				
				854002	101				
				854003	103, 105				



Subject	Page
A	
AC motors, standard 115V	458
Actuator specifications	
Angle valves	199
Gate valves	166
Adapters	
Tapped Flange adapter	64
Cluster flanges	74-75
Multiport Flanges	74-75
Del-Seal™ CF to Del-Seal™ CF Reducers, Zero Length	61
ISO KF & LF to Del-Seal™ CF	150
ASA to Del-Seal™ CF, Zero Length	151
ASA Flange to ISO KF & LF	152
Swagelok® to Del-Seal™ CF & ISO KF	154
VCR® to Del-Seal™ CF & ISO KF	155
Quick-Disconnect to Del-Seal™ CF & ISO KF	156-157
NPT, Female to Del-Seal™ CF & ISO KF	158
NPT, Female to Baseplate	159
NPT, Male to Del-Seal™ CF & ISO KF	159
Hose adapter to ISO KF	160
Welch Pump to ISO KF	160
Test Port Kit	284
Glass to Metal, Flanged	312-315
Glass to Bellows, Flanged	316
Air control solenoid valve	
Angle valves	196
Gate valves	164
Motion	see indiv. item
Air cylinder	
Angle valves	199
Inline valves	199
Gate valves	167
Air pressure ratings	
Angle valves	199
Inline valves	199
Gate valves	167
Air-Open/Air-Close valves	
Angle	208-221
Inline	228-233
Gate valves	168-193
Air-Open/Spring-Close valves	
Angle, 1/4" to 1-1/2"	200-207
Inline, 3/4" to 1-1/2"	222-227
Alignment gimbal	440
All-Metal valves	
Angle	236
Inline	237
Sealing torque	234

Subject	Page
Angle valves, adjustable leak	
Fine leak	238
Precision leak	239
Angle valves, high and ultrahigh vacuum	
Installation	198
Maintenance	198
1/4" and 1/2" tube O.D.	200-201
3/4" tube O.D.	202-203
1" tube O.D.	204-205
1-1/2" tube O.D.	206-207
2" tube O.D.	208-209
2-1/2" tube O.D.	210-211
3" tube O.D.	212-213
4" tube O.D.	214-215
6" tube O.D.	216-217
8" tube O.D.	218-219
10" tube O.D.	220-221
Gaskets, see valve size	
Port connections, Angle Valve	
Del-Seal™ CF	200-221,236
Kwik-Flange™ ISO KF	200-221
Tube weld	200-221,236
ANSI ASA ports	
Gate valves	174-189
Apiezon® vacuum grease	285
ASA bolt reducer bushings	175-181
ASA flanges	130-131
ASA to Del-Seal™ CF	151
At-A-Glance, product overview	2-15
B	
Bakeout heater	
Sorption pump	258
Traps	247
Bakeout, specifications	
Angle valves	199
Inline valves	199
Gate valves	166-167
Motion	see indiv. items
Ball wrench	29
Band clamp flange	94-103
Defined	85

Subject	Page
Baseplates	472,478-479
Accessories	475,477
Blank-off plug	161
Electrical feedthroughs	338-339, 359-365
Feedthrough, rotary motion	384
Kwik-Flange™ ISO KF	161
Liquid feedthroughs	359-365
NPT adapters	159
Quick-Disconnect	156
Base wells	472,478-479
Bayard-Alpert ionization gauge tubes	294-295
Bearings, linear & rotary	
In-vacuum	451-452
Mounts	448-452
Bell Jars	
L-gasket	477
O-ring	475,477
Stainless steel	474-475
Surface science analysis chamber	480-483
Bellows adapters	
Del-Seal™ CF to glass	316
Bellows	
Edge welded	135
Flanged	68, 117
Formed	136-137
Blank-off	
Quick-Disconnect	147
Base plate	161
BNC coaxial	324-325
Bolt reducer bushings, ASA	175-181
Bolt sets, Flanges	
Del-Seal™, <i>see flange sizes</i>	29-55
12-point head	31-47
12-point head, silver plated	31-47
12-point head, plate nut	31-47
Hex head	31-55
Hex head, plate nut	33-41
Socket head	29
Socket head, silver plated	29
Socket head, plate nut	29
Double sided Del-Seal™	57-59
ANSI ASA	131
Wire Seal	76-77
Quick-Access doors	438
Bolt sets, Valves, Silver plated	
All metal	237
Gate	169-189
Angle	201-221
Inline	223-233



Subject	Page
Bolt sets, Valves, Metric	
Gate	169-189
Bolt tightening, Del-Seal™ CF	
Specifications, general	26
Bonnet & gate seals	
Specifications for	166
Bonnet & gate gasket kits for	
Circular valve	169-189
Rectangular valve.	191,193
Bonnet gasket	
All-Metal angle and inline valves.	237
Angle and inline valves	201-233
Bourdon gauge	288,290
Braided, flexible stainless steel hose	263-277
Breaks & envelopes	
Ceramic	323,342-343
Burst disc	284
Butterfly valves	240-241
Bulkhead Clamps	80,87-93

C

Centering rings	
Kwik-Flange™ ISO KF	81,87-93
Angle valves ISO KF.	201-209
Large-Flange™ ISO LF.	82,94-111
Angle valves ISO LF.	211-221
Ceramic	
Beads.	347,356
Breaks.	342-343
Envelopes	342-343
Spacers	347,356
Chambers	
Introduction.	472
Baseplates & base wells	478-479
Bell Jars, stainless steel	474-475
Feedthrough collars.	476-477
Surface Science Analysis.	480-483
Custom	
Azimuthal angle	486
Cleaning.	489
Focal point	486
Leak testing	489
Materials	488
Packaging & shipping.	489
Polar angle	486
Pressure rating.	489
Surface finishes	489

continued...

<i>...continued</i>	
Water cooling	488
Welding techniques	489
Fabrication tolerances	487
Geometry, custom engineering	487
Circular entry load-lock system	432-433
Circular gate valves	163,168-189
Introduction.	164
Specifications for	166
Clamps	
Band ISO LF	85,95-103
Band, defined ISO LF.	85
Bulkhead ISO KF.	80,87-93
Bulkhead, defined ISO KF	80
Claw, defined ISO LF.	84
Double claw ISO LF	95-111
Hinged ISO KF.	80
Hinged, defined ISO KF	80
Single claw ISO LF.	95-111
Clamps, double claw,	
Large-Flange™ ISO LF	95-111
Clamps, hinged,	
Kwik-Flange™ ISO KF	80,87-93
Clamps, single claw,	
Large-Flange™ ISO LF	95-111
Claw clamp	
Flange, ISO LF	95-111
Introduction.	84
Cluster flange, Del-Seal™ CF	75
Coaxial cable connectors	322,325-331
Coaxial feedthroughs	322, 325-331
Coaxial foreline traps	248-253
Coaxial in-vacuum wire	352-353
Coaxial Traps	
Filter elements.	252-253
Single piece.	248-249
Two piece	250-251
With replaceable filter	250-251
Compact linear motion feedthrough	389
Compact Z axis stage	422
Company overview	20-21
Conical reducer	
Del-Seal™ CF flanged	65
ISO flanged	120
Weldable	134

Connectors, electrical	
Angle clamp	333,335
Coaxial cable.	353
Crimp	347,351,354
High current power	335,355
Inline clamp	333,355
Inline electrical.	333,355
Push on	325-333,337, 345-347,355
Contents	16-17
Controller, motor speed	464-465
Conversion tables	494-495
Copper Gaskets, see flange size	29-59
Coupling, flexible with	
Del-Seal™ CF	68
Kwik-Flange™	117
Large-Flange™.	117
Weldable	136-137
Coupling, PVC	280
Coupling, In-vacuum	451
Crimp connectors	347,350,355
Crosses	
Five-way, Del-Seal™ CF	72
Five-way, KF & LF	128
Five-way, weldable	144
Four-way reducer, Del-Seal™ CF	71
Four-way reducer, ISO KF & LF.	127
Four-way reducer, weldable	143
Four-way, Del-Seal™ CF.	70
Four-way, ISO KF & LF.	126
Four-way, weldable	142
Six-way, Del-Seal™ CF.	73
Six-way, ISO KF & LF.	129
Six-way, weldable	145
Cryogenic sorption pump	256-259
Cryogenic feedthroughs	363-365
Cube, Del-Seal™ CF	73

D

D-connector	
Subminiature electrical feedthroughs	348-351
DC motors	
Miniature 12V	459
Standard 90V	458
Controllers.	464
Del-Seal™ CF fittings	62-75
Del-Seal™ CF metal seal flanges	28-61, 74-75



Subject	Page
Del-Seal™ CF flange with-	
Up-to-air valve	282-283
Thermocouple gauge tube	282
Del-Seal™ CF ports, gate valves with-	
Del-Seal™ CF port, 1.33" flange	168-169
Del-Seal™ CF port, 2.75" flange	170-171
Del-Seal™ CF port, 3.38" flange	172-173
Del-Seal™ CF port, 4.5" flange	174-175
Del-Seal™ CF port, 4.63" flange	176-177
Del-Seal™ CF port, 6" flange	178-179
Del-Seal™ CF port, 6.75" flange	180-181
Del-Seal™ CF port, 8" flange	182-183
Del-Seal™ CF port, 10" flange	184-185
Del-Seal™ CF port, 13.25" flange	186-187
Del-Seal™ CF port, 14" flange	188-189
Del-Seal™ CF hybrid adapters to	
ASA	151
ISO KF & LF	150
NPT	158
Quick-Disconnect	156
Rectangular	435
Swagelok®	154
VCR®	155
Del-Seal™ CF tube fittings	62-73
Dewar, polystyrene	258
Differentially pumped	
Multi-motion feedthrough	406
Rotary motion feedthrough	385
Direct drive rotary motion	385
Directions to MDC	526
Dished head, wire seal flanges	76-77
Double claw clamp, ISO LF	95-111
Double ended glass components	
Del-Seal™ CF	314
Kwik-Flange™ ISO KF	314
Double impulse solenoids	190-193
Double sided flanges	
Del-Seal™ CF	56-59
Del-Seal™ CF with NPT holes	282
Double sided access flange	282
Dow Corning® vacuum grease	285
Dual O-ring shaft seal, feedthrough	385,406
Dual XY-axis stage	416-417

E

Edge welded bellows	
Weldable end plate	135

Subject	Page
Elastomer seals	
Angle valves	201-221
Inline valves	222-233
Gate valves	169-189
Elbow, 45°	
Del-Seal™ CF	66
ISO KF & LF	121
PVC	281
Weldable	138
Elbow, 90°	
Del-Seal™ CF	66-67
ISO KF & LF	122-123
PVC	281
Weldable	138
Elbow, high conductance	
Del-Seal™ CF	67
ISO KF & LF	123
Weldable	139
Electrical Feedthroughs, see feedthroughs	
Electrical Connectors	354-355
Electrical Safety accessories	356
Electropneumatic actuator specifications	
Angle valves	196
Inline valves	196
Gate valves	166
Encoder, option	382,391
Engineering, custom	486-493
Envelopes, ceramic	342-343
Epoxy patch	285
Extended length rotary motion	380
Extension rod, Mini-Scaffold™	449

F

Feedthrough collars	476-477
Feedthroughs, Electrical	
Introduction	320-323
BNC Coaxial	324-325
MHV Coaxial	326-327
SHV Coaxial	328-329
Type-N Coaxial	330-331
Medium Current	332-333
High Current	334-335,338-339
High Voltage	336-337
RF Power	340-341
Breaks & Envelopes	342-343
Multipin Power	344-345
Multipin Instrumentation	346-347
	<i>continued...</i>

Subject	Page
<i>...continued</i>	
Type-D Instrumentation	348-351
In-Vacuum Insulated Wire	352-353
In-Vacuum Connectors	354-355
Insulators & Shields	356
Feedthroughs, Gas/Liquid	
Introduction	357
General Purpose with Swagelok®	358-359
General Purpose with VCR®	360-361
Liquid Nitrogen with Swagelok®	362-363
Liquid Nitrogen with VCR®	364-365
Feedthroughs, Motion	
Introduction	368-372
Glossary	370-371
Reference Tables	372
Rotary Standard	378-379
Rotary High Temperature	380
Rotary Pneumatic	381
Rotary Miniature	382
Rotary Precision	383
Rotary Magnetic & Direct drive	384
Rotary Direct & Differentially Pumped	385
Linear Standard	386-387
Linear High Temperature	388
Linear Miniature	390-391
Linear Push Pull	392-393
Linear Rack & Pinion	394-395
Linear Pneumatic	396-397
Linear Heavy Duty	398
Linear Heavy Duty, Micrometer	402
Rotary-Linear Standard	403
Rotary-Linear Precision	404-405
Rotary-Linear Direct	406
Wobble Stick	407
Wobble Stick with Pincer	408
Wobble Stick Rotary with Pincer	409
Fel-Pro® C-102	285
Filaments, replacements for	
Ionization gauge tubes	295-297
Filter elements,	
Traps, replaceable	252-253
Fitting to flange hybrid adapters	154-161
Fittings	
Introduction	62
Del-Seal™ CF	62-75
Hybrid	148-161
Introduction	112
ISO KF & LF	112-129
Kwik-Flange™	112-129
Large-Flange™	112-129
PVC	278-281
Metal seal	62-75
Weldable	132-145



Subject	Page
Flange adapters	
Rectangular	435
Del-Seal™ CF	61,74-75,151
ASA	151
Hybrids	148-161
Flange covers	
Del-Seal™ CF flanges	29-47
Kwik-Flange™ ISO KF	87-93
Flange installation, specifications	
Del-Seal™ CF metal seal	26
Kwik-Flange™ ISO KF	78-85
Large-Flange™ ISO LF	78-85
Flange to flange hybrid adapters .	150-153
Flanges, Metal Seal	
Introduction	24-27
Installation	26
Specifications	26
Conflat™ see Del-Seal™ CF	24
Cluster Flanges	74-75
Copper Gaskets, <i>see flange size</i>	
Rotatable Del-Seal™ CF	28-55
Rotatable tapped Del-Seal™ CF	28-55
Nonrotatable Del-Seal™ CF	28-55
Nonrotatable tapped Del-Seal™ CF	28-55
Double Sided Del-Seal™ CF	56-59
Reducer Zero Length Del-Seal™ CF	60-61
Wire Seal	76-77
Flanges, ASA	
Introduction	130
ASA to Del-Seal™ CF Zero Length	151
ASA Smooth face	131
ASA with O-ring groove	131
Flanges, ISO KF & ISO LF	
Introduction	78-85
Kwik-Flange™ ISO KF	86-93
Large-Flange™ ISO LF	94-111
Watercooled, ISO KF & LF	113
Flexible couplings	
Del-Seal™ CF	68
ISO KF & LF	117
Flexible stainless steel hose with	
Del-Seal™ CF	264-265
ISO KF & LF	266-267
Weldable	268-269
Process lines	271-277
Fluid feedthroughs	
Introduction	357
General purpose	358-361
Liquid nitrogen	362-365

Subject	Page
Foreline traps	
Introduction	244
Cleaning	244,246
Coaxial	248-249
Coaxial, replaceable filter	250-251
Liquid nitrogen	254-255
Molecular sieve	246-247
Formed bellows	
Standard cuff	136
Weld cuff	137

G

Gasket material, defined	24
Gaskets	
OFE copper	
Valves	169-237
Flanges	28-59
OFHC copper	see OFE
O-rings, gate valves	169-233
Kalrez®, option	169-237
Viton®	
Valves	169-237
Flanges	29-131
Gate valves	
Introduction	164
Installation	166
Bonnet & gate, gasket kits for	
Circular valve	168-189
Rectangular valve	190-193
Options	164-165
Power ratings	166-167
Maintenance	166-167
Manual actuator	166-167
Specifications	166-167
Standard features	164
Port size, Gate valves	
.625" I.D.	168-169
1.5" I.D.	170-171
2" I.D.	172-173
2.5" I.D.	174-175
3" I.D.	176-177
4" I.D.	178-179
5" I.D.	180-181
6" I.D.	182-183
8" I.D.	184-185
10" I.D.	186-187
12" I.D.	188-189

Subject	Page
Port connections, Gate Valves	
ANSI ASA	174-189
Del-Seal™ CF	168-189
ISO KF & LF	168-189
Gauges, Vacuum	
Introduction	288
Bourdon Gauge	290
Thermocouple Gauge	291-293
Nude Ion Gauge	294-297
Ion Gauge Tube, Glass Envelope	298-299
Gears, miter & bevel	450
Gimbal port aligner	
Load-lock	440
Standard	441
Glass components	306-316
Introduction	302-305
Bellows adapters	316
Double ended	314
Glass to metal	312-313
Sealed off	315
Viewports	306-310
Ionization gauge tubes	298-299
Glossary	
Motion & Manipulation	370-371
Reference	496-500
Ground stock, Stainless Steel	452
Guided magnetic transporter	436-437

H

Half nipples	
Del-Seal™ CF	63
Kwik-Flange™ ISO KF	114
Large-Flange™ ISO LF	115
Hardware accessories, motion	444
Heaters	
Molecular sieve foreline trap	247
Sorption pump bakeout	258
Heavy duty, motion feedthroughs	
Linear motion	398
Micrometer	402
Pneumatic	399
Push-pull	400
Tunnel access	401
High current feedthrough	
Baseplate mount	338-339
Watercooled	339
High current power connectors	335



Subject	Page
High temperature	
Compact linear motion	389
Gaskets, angle valves	197
Gaskets, gate valves	165
Gate seal	165
Linear motion	388
Rotary motion	380
High voltage feedthrough,	
Power	336-337
Hinged clamp	
Defined	80
Kwik-Flange™	87-93
Hoses	
Stainless steel, flexible.	263-277
PVC, wire reinforced	262
Process lines, stainless steel	271-277
Hose clamps	262
Humphrey solenoid valves,	
Angle valves	200-221
Inline valves.	222-233
Gate valves	168-189
Hybrid adapters	
ISO KF & LF to Del-Seal™ CF	150
Del-Seal™ CF to ASA	151
ISO KF & LF to ASA	152
Swagelok® to Del-Seal™ CF	154
Swagelok® to ISO KF	154
Male VCR® to Del-Seal™	155
Male VCR® to ISO KF	155
Quick-Disconnect to Del-Seal™ CF	156-157
Quick-Disconnect to Baseplate	156-157
Quick-Disconnect to ISO KF	156-157
NPT Female to Del-Seal™ CF	158
NPT Female to ISO KF	158
NPT Female to Baseplate	159
NPT Male to ISO KF	159
Rubber Hose to ISO KF	160
PVC Hose to ISO KF	160
Welch Pump Adapter to ISO KF	160
Baseplate to Blank Plug	161
Baseplate to ISO KF	161
In-vacuum	
Introduction	443
Accessories	443-452
connectors	354-355
BNC	325
Type-D	348-351

Subject	Page
Insulated wire	352-353
Ribbon cable	350-351
Inch-Metric comparison	79,82
Index	
Alphabetical	514-522
Part number	504-513
Product at-a-glance	2-15
Reference number	501-503
Inline electrical connectors	354
Inline valves	
3/4" tube O.D.	222-223
1" tube O.D.	224-225
1-1/2" tube O.D.	226-227
2" tube O.D.	228-229
2-1/2" tube O.D.	230-231
3" tube O.D.	232-233
Inline valve gaskets, <i>see valve size</i>	
Inline valves	
All-Metal	237
Instrumentation Feedthroughs, see	
Feedthroughs	
Insulators & shields, electrical	356
Introduction	
Motion & Manipulation	368-369
Cab-Fast® sample holders	443
In-vacuum accessories	443
Load-lock systems.	430-431
Mini-Scaffold™ mounting system.	446
Motion accessories	450
Motorization	456
Rotary, linear and multi-motion	376
Stages, Z, XY, XYZ	414
Chambers	472
Circular gate valve	164
Del-Seal™ CF flanges	24-27
Del-Seal™ CF fittings	63
Electrical feedthroughs	320-323
Fluid feedthroughs	357
Foreline traps.	244-245
Ionization Gauge Tubes	288-289
ISO family	78-85
ISO KF & LF fittings	112
Kwik-Flange™ ISO KF	78-81
Large-Flange™ ISO LF	82-85
MDC	20-21
MESC gate valve	190-191
Metal seal flanges	24-27
Product line	18-19
Rectangular gate valve	192-193
	<i>continued...</i>

Subject	Page
<i>...continued</i>	
Thermocouple gauge tubes	291
Vacuum measurement	288-289
Vacuum pumps	256
Viewports & glass components	302-305
Ionization gauge tubes	294-299
ISI, Insulator Seal	320-321
ISO certification, MDC	21
ISO Flanges <i>see flanges</i>	
ISO Fittings <i>see fittings</i>	
ISO NW ports, gate valves with	
ISO NW16 port.	168-169
ISO NW40 port.	170-171
ISO NW50 port.	172-173
ISO NW63 port.	174-175
ISO NW80 port.	176-177
ISO NW100 port.	178-179
ISO NW160 port.	182-183
ISO NW200 port.	184-185
ISO NW250 port.	186-187
ISO NW320 port.	188-189

J

K

Kalrez®	
Gasket, optional	165
Specifications for	166
Kapton® insulated wire	352-353
Kapton® ribbon wire	350-351
Krytox® LVP	285
Kwik-Flange™ ISO KF	78-81,86-93
Kwik-Flange™ ISO KF hybrid adapters to	
Baseplate	161
Del-Seal™ CF	150
NPT	158-159
PVC hose	160
Quick-Disconnect	157
Rubber hose	160
Swagelok®	154
VCR®	155
Welch pump	160
Kwik-Flange™ ISO KF with-	
Up-to-air valve	283
Kwik-Flange™ ISO KF,	
angle valves <i>see angle valves</i>	



Subject	Page
Kwik-Flange™ ports, gate valves with	
ISO NW16 port	168-169
ISO NW40 port	170-171
ISO NW50 port	172-173

L

Large-Flange™ Introduction	82-85
Large-Flange™ ISO LF	94-111
Large-Flange™ ISO LF hybrid adapters to Del-Seal™ CF	150
Large-Flange™ ports, gate valves with	
ISO NW63 port	174-175
ISO NW80 port	176-177
ISO NW100 port	178-179
ISO NW160 port	182-183
ISO NW200 port	184-185
ISO NW250 port	186-187
ISO NW320 port	188-189
Leak valves	238-239
Linear motion	386-402
Heavy duty pneumatic actuator	399
Linear motion pneumatic actuator	396-397
Liquid feedthroughs	357-365
Liquid nitrogen	
Feedthroughs	362-365
Foreline traps	254-255
Load-lock	
Introduction	430-431
Circular entry	432-433
Magnetic transporters	436-437
Quick-access doors	438-439
Rectangular entry	434-435
Systems	430-435
Valves	190-193
Lubricants	285

M

Magnetic	
Drive, rotary motion	384
Position indicator	165
Transporters	436-437

Subject	Page
Materials, specifications	
Angle valves	199
Inline valves	199
Gate valves	166-167
Other products	see indiv. item
Maximum thermal gradient ,	
Ceramic-to-metal	323
MDC corporate profile	20-21
Mechanical position indicator	
Angle valves	196
Inline valves	196
Gate valves	164
MESC, rectangular gate valve	
Specifications	167
Introduction	190-191
Valves	190-191
Metric thread, gate valves with-	
Del-Seal™ CF port flanges	168-189
MHV coaxial	326-327
Micro switches, optional	164,196
Micrometer	
Linear motion	402
XYZ stages	414
Microswitch position indicator	
Angle valves	196
Gate valves	164
Mini flange	28-29
Mini-Scaffold™ mounting system	446
Introduction	446
Port clamp mount	446
Miniature in-vacuum steppers	462-463
Miniature linear motion	390-391
Miniature rotary motion	382
Molecular sieve	
Foreline traps	246-247
Introduction	244
Replacement charge	247
Heater	247
Motion and manipulation	
Glossary	370-371
Introduction	368-369
Products	378-465
Motion Technology	368
Motion Port aligners	
Gimbal, load-lock	440
Gimbal, standard	441
Off-axis heavy duty	442
Off-axis precision	442
Motion accessories, in-vacuum	443
Introduction	443

Subject	Page
Motorization	456-465
Introduction	456-457
Motors	
AC	458
DC	458-459
Controllers	464-465
In-vacuum	462-463
Stepper	460-463
Mounting plates & straps,	
in-vacuum	447-448
Mounts, mirror & lens	449
Multi-Mini flange	75
Multi-motion feedthroughs	
Differentially pumped, direct drive	406
Precision rotary-linear motion	404
Standard rotary-linear motion	403
Wobble stick	407
Wobble stick with pincer grip	408
Wobble stick, rotary with pincer grip	409
Wobble stick, wide angle	410
Multi-pin electrical feedthroughs	344-347
Connectors	345,347
Instrumentation	346-347
Power	344-345
Multiport Flanges, metal seal	
Angled, Del-Seal™ CF	74
Cluster flange, Del-Seal™ CF	75
Multi-Mini, Del-Seal™ CF	75
Straight-in, Del-Seal™ CF	74
N	
Nickel diaphragm, leak valve	238
Nipples	
Conical reducers, Del-Seal™ CF	65
Conical reducers, ISO KF & LF	120
Del-Seal™ CF	64
ISO KF & LF	116
Minimum length, Del-Seal™ CF	64
Straight tube reducers, Del-Seal™ CF	65
Straight tube reducers,	
ISO KF & LF	118-119
Nonmagnetic viewports	307
Nonrotatable flanges	26-27
NPT hybrid adapters	
Baseplate	159
Del-Seal™ CF	158
Kwik-Flange™ ISO KF	158-159
N-type coaxial feedthrough	330-331
Nude ionization gauge tubes	294-297



Subject Page

O

O-ring seal
 Differentially pumped 385,406
 Multi-motion 406
 Rotary motion 384-385
 General temperature 26

OFE copper 24,26

Off-axis port aligner
 Heavy duty 442
 Precision 442

OFHC copper see OFE copper

Options, valves
 Angle and inline valve 196-197
 Gate valve 164-165
 High temperature gate seal 165
 Position indicator 165
 Poppet seal, high temperature 197
 Position indicator, magnetic 197
 Position indicator, mechanical 164,196
 Roughing ports 165
 Solenoid, air control 165,197

Orientation, installation
 Angle valve 198
 Inline valves 198
 Gate valve 166-167

P

Pipe thread to Del-Seal™ CF, ISO KF hybrid adapters 158-159

Pneumatic linear motion 396-397
 Rotary motion 381

Plate nut see Del-Seal™ CF flange size

Pneumatic actuator specifications
 Angle valves 198-199
 Inline valves 198-199
 Gate valves 166-167

Poppet gasket, angle and inline valves
 1/4" and 1/2" tube O.D. 201
 3/4" tube O.D. 203,223
 1" tube O.D. 205,225
 1-1/2" tube O.D. 207,227
 2" tube O.D. 209,229
 2-1/2" tube O.D. 211,231
 3" tube O.D. 213,233
 4" tube O.D. 215
 6" tube O.D. 217
 8" tube O.D. 219
 10" tube O.D. 221

Subject Page

Poppet seal, high temperature 197

Port Aligner
 Load lock Gimbal 440
 Standard Gimbal 441
 Off axis, heavy duty 440
 Off axis, precision 440

Port connection guide 199

Position indicators, valves
 Magnetic reed switch 197
 Mechanical microswitch 164,196

Power feedthrough
 Electrical 324-339
 Multipin 344-347
 RF 340-341

Precision leak valves 238-239

Precision motion
 Introduction 371
 Linear motion 402
 Multi-motion 404-405
 Rotary motion 383

Pressure inlet valve 238-239
 Burst disc 284

Products, at-a-glance reference 2-15

Process lines, stainless steel 271-277

Pumps, Sorption 256-259

Push on connectors, electrical 354

Push-pull linear motion 392-393

PVC fittings
 45° elbow 281
 90° elbow 281
 Primer & cement 278
 PVC coupling 280
 Rigid tubing & fittings 279
 Tee 280
 Tube, rigid wall 279
 Tubing & fittings 278-281
 Weld flanges 279

PVC wire reinforced hose
 Coiled hose 262
 Kwik-Flange™ ISO KF hybrid adapters . 160

Pyrex® viewport
 Introduction 304
 Weldable 310

Q

Quartz viewports 308

Quick-Access doors 438-439

Quick-Disconnect fittings
 Flanged 156-157
 Weldable 146-147

Subject Page

Quick-Disconnect hybrid adapters
 Baseplate 156
 Del-Seal™ CF 156
 Kwik-Flange™ 157

R

Rack and Pinion linear-motion feedthrough 394-395

Rectangular entry load-lock 434-435
 Flange adapter 435
 Gate valves 190-193
 Introduction 192-193

Reducers, see adapters

Reed switch, magnetic 197

Replaceable filter, foreline traps 252-253

Retainer, O-ring 81

Return policy 529

RF power feedthrough 340-341

Ribbon cable 350-351

Rotary motion feedthroughs 379-385
 Introduction 376
 Differentially pumped 385
 High temperature 380
 Magnetic 384
 Miniature 382
 Pneumatic actuator 381
 Precision 383
 Standard 378

Rotatable axis 360° 428-429

Rotatable bolt ring, defined 84

Rotatable Flanges, defined 26

Rotatable Flanges 26-27

Rotatable, Mounting table 428-429

Roughing components
 Accessories 282-285
 Hose, flexible stainless steel,
 Braided 264,266,268
 Unbraided 265,267,269
 Port, optional 165
 Rubber hose to Kwik Flange™ 160
 ISO KF™ hybrid adaptors 160

S

Safety accessories
 Acrylic shield, fits 1" baseplate 356
 Acrylic shield, fits 2-3/4" 356

Sales Representatives Inside back cover

Sample holders, Cab-Fast® 444-445

Sapphire viewports 309

Subject	Page
Sapphire poppet seal, leak valve	239
Screws	
Cab-Fast®	445
Mini-Scaffold™	449
Vented.	452
SEMI/MESC	
Rectangular gate valves.	190-191
Specifications	190-191
Shields	
High voltage	356
Viewport	311
Shipping method	527
Shutters, viewport	311
SHV coaxial	328-329
Single axis, compact z stage	422-423
Slit valves	190-193
Socket weld, Kwik-Flange™ ISO KF	86-93
Solenoid, air control valves	
24VDC.	197
120VAC	197
240VAC	197
240VAC, optional, gate valve	165
24VDC, angle valves, general	197
24VDC, double action, gate valve.	190, 193
24VDC, optional, gate valve.	165
Sorbent material, Type 5A	259
Sorption pumps	256-259
Specifications	
All-metal angle and inline valves	234-235
Angle valves	see indiv. item
Gate valves	see indiv. item
General, metal seal, flange	26
High vacuum leak valve	238
Inline valves	see indiv. item
Motion	see indiv. item
Ultrahigh vacuum leak valve	239
Specimen holder, Mini-Scaffold™	447
Speed controllers	464-465
Stages	
Introduction	414-415
Single axis, compact	422-423
Triple axis, compact.	424-425
Triple axis, precision	426-427
V-Plane® single axis.	418-419
V-Plane® dual axis	416-417
V-Plane® guide tube.	420-421

Subject	Page
Stainless steel	
Bell jars	474-475
Flexible Hose	264-277
Stepper motors	
Air side	460-461
Controller	465
Indexer	465
In-vacuum	462-463
Subminiature connectors	351
Surface science analysis chamber	480-483
Swagelok® hybrid adapters	
Del-Seal™ CF	154
ISO KF & LF	154
Liquid feedthroughs	359,363
Switches	
Magnetic reed.	197
Mechanical microswitch.	164,196
T	
Tapped flange adapter, Del-Seal™ CF	64
Tee reducers	
Del-Seal™ CF	69
ISO KF & LF.	125
Weldable	141
Tees	
Del-Seal™ CF	68
ISO KF & LF.	124
PVC.	280
Weldable	140
Temperature ratings	
Angle valves	199
Inline valves	199
Gate valves	166-167
Flanges	12, 72-96
Test port kit	284
Thermocouple gauge tubes	292-293
Introduction.	291
Thin wall flexible stainless steel hose	265,267,269
Trademark ownership	527
Transport rod dock, Cab-Fast®	445
Traps, Roughing	
Introduction.	244
Molecular Sieve	246-247
Coaxial, two piece	250-251
Filter Elements.	252-253
Liquid Nitrogen	254-255
Triple axis, compact stage	424-425
Precision stage	426-427

Subject	Page
Tubing	
PVC	279
Stainless steel.	133
Type-D subminiature	348-351
Type-N coaxial	330-331
U	
UHV Flanges & Components	
see Flanges, Metal Seal	
see Fittings, Metal Seal	
ULV Series leak valves	239
Unbored stub, Kwik-Flange™ ISO KF & LF.	86-95
Unbraided, flexible stainless steel-hose	265-269,272-277
Universal joint, in-vacuum	450
Up-to-air valve, flanged	282-283
Up-to-air valves	283
V	
V-Plane®	
Dual axis, XY stage	417
Guide tube	421
Single axis, Z stage.	419
VacOptix®	305
Vacuum	
Accessories, In-vacuum	443-452
Chambers	472-483
Components made to order	488-489
Grease	285
Lubricants.	285
Measurement.	287-299
Pumps	256-259
Roughing hose, PVC	279
Stainless hose, flexible.	263-277
Tubing.	133
Valves	
All-Metal	234-237
Angle	196-221
Butterfly.	240-241
Gate.	164-189
Inline	222-233
Leak	238-239
Load-Lock	190-193
Rectangular.	190-193
Slit.	190-193
Up-to-Air	282-283
Variable Leak.	238-239



Subject **Page**

Valve Options
 Angle and inline valve 196-197
 Gate valve 164-165
 High temperature gate seal 165
 Position indicator 165
 Poppet seal, high temperature 197
 Position indicator, magnetic 197
 Position indicator, mechanical . . . 164,196
 Roughing ports 165
 Solenoid, air control 165,197
VCR® fitted angle valve, 1/4" 200
VCR® fitting port connections 199
VCR® hybrid adapters
 Del-Seal™ CF 155
 ISO KF & LF 155
 Fluid feedthroughs 361
 Liquid nitrogen feedthroughs 365
Vented screws 452
Viewports
 Introduction 302-305
 Doors, Quick access 438-439
 Glass 306-307
 Nonmagnetic 307
 Quartz 308
 Quartz, materials 303
 Sapphire 309
 Shields, shutters 311
 Shutter assemblies 311
 Specifications 303
 Surface finish 304
 Transmission curves 304
 Weldable with Pyrex® 310
Viton® elastomer gaskets-see individual parts
 Temperature 26

W

Warranty 527
Water feedthroughs 358-361
Watercooled feedthrough,
 electrical 338-339
Watercooled flanges
 Kwik-Flange™ ISO KF 113
 Large-Flange™ ISO LF 113
Welch pump to Kwik-Flange™
 ISO KF hybrid adapters 160

Subject **Page**

Weld fittings
 Stainless steel 132-145
 PVC 278-281
Weld flanges
 ANSI 130-131
 ASA 130-131
 Del-Seal™ CF 28-55
 Kwik-Flange™ ISO KF 86-93
 Large-Flange™ ISO LF 94-111
 PVC 279
 Wire seal 76-77
Welded bellows, with weldable
 end plates 135
Wire, in-vacuum, insulated 352-353
Wire seal flanges 76-77
 Introduction 76
Wire strippers 352
Wobble stick
 Standard 407
 Wide angle 410
 With pincer grip 408
 With rotary motion & pincer grip 409
Wrench
 Box 31-47
 Ball 29

X

XY dual axis stage 417
XYZ stage 426-427

Z

Z axis guide tube 420-421
Z single axis stage 418-419,422-423
Zeolite 258
Zero length reducers,
 Del-Seal™ CF 60-61
Zero profile viewports 306-309






For a quick visual search,
refer to the
Products At A Glance
pages in the front of this catalog.

Sample page...

Section 2



Valves

Circular Gate



PG 168

Rectangular Gate



PG 190

Angle



PG 200

Inline



PG 222

All-Metal



PG 236

Variable Leak



PG 238

Precision Leak



PG 239

Butterfly




PG 241

Index & Reference



Enabling Science to Change the World

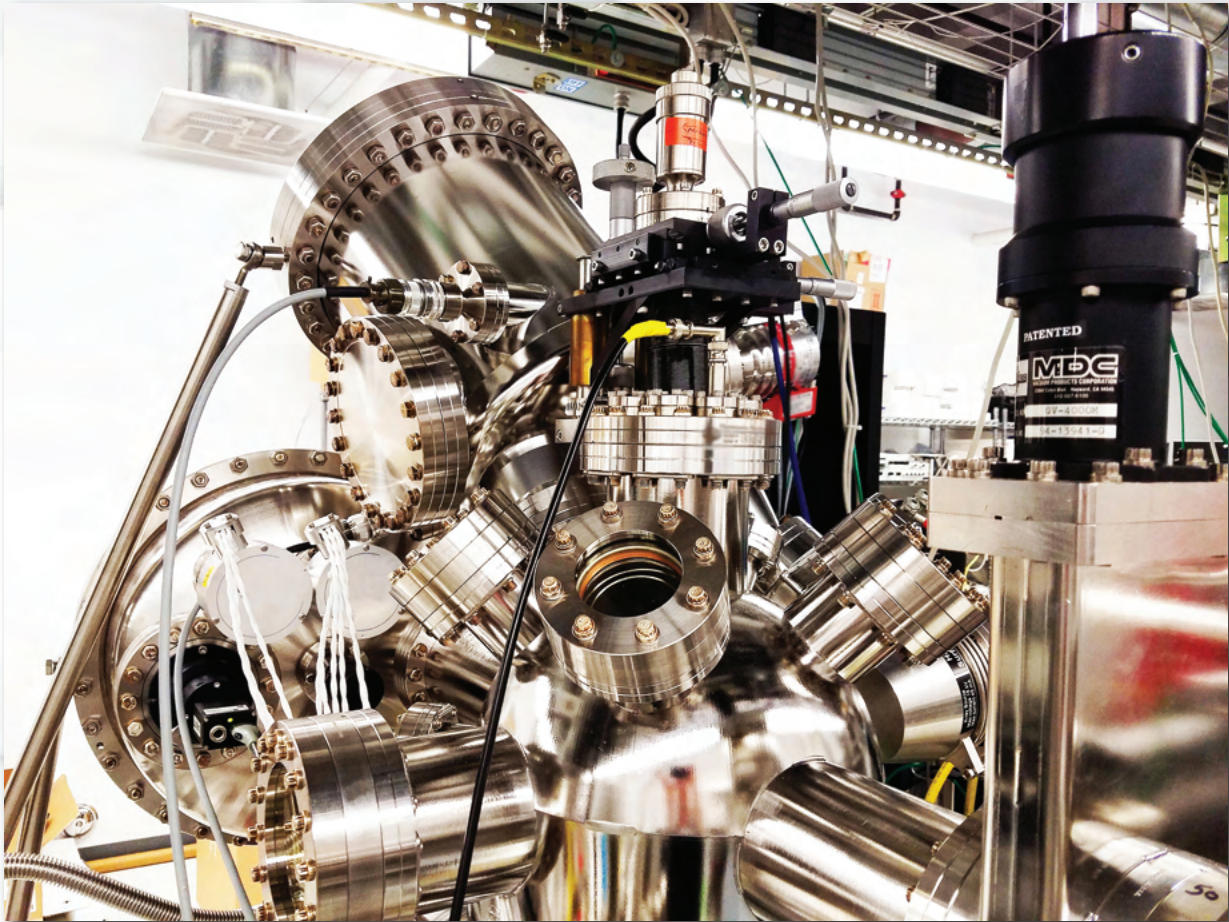

DRIVING YOUR PROCESS FORWARD